


Power supply CP-S 24/10.0

Primary switch mode power supply

Data sheet



- ① OUTPUT L+, L-: terminals - output
- ② INPUT L, N, PE: terminals - input
- ③ OUTPUT OK: green LED - output voltage OK
- ④ INPUT VOLTAGE SELECTOR: selector switch - adjustment of input range
- ⑤ Circuit diagram

Features

- 2 single input ranges: 110-120 V AC (85-132 V AC) and 220-240 V AC (184-264 V AC, 220-350 V DC) adjustable with selector switch
- Constant, controlled output voltage of 24 V DC
- Rated output current 10 A
- Open-circuit, overload and continuous short-circuit proof
- Power reserve up to 20 %
- High efficiency of typ. 89 %
- Low power dissipation and low heating
- Pluggable double connecting terminals
- Integrated input fuse
- Parallel operation for redundancy
- LED for status indication
- Redundancy unit CP-A RU and control module CP-A CM (for CP-A RU) available as accessories

Approvals



UL 508, CAN/CSA C22.2 No.14
 UL 1604 (Class I, Div 2, hazardous locations),
 CAN/CSA C22.2 No.213

Approval refers to rated input voltage U_{in}



UL 60950, CAN/CSA C22.2 No.60950

Approval refers to rated input voltage U_{in}



GOST



CB scheme

Approval refers to rated input voltage U_{in}

Marks

CE CE
 C-Tick C-Tick

Order data

Type	Input voltage range	Rated output voltage / current	Order code
CP-S 24/10.0	85-132 V AC, 184-264 V AC / 220-350 V DC	24 V DC / 10 A	1SVR 427 015 R0100

Order data - Accessories

Type	Description	Order code
CP-A RU	Redundancy unit The CP-A RU provides decoupling of two CP power supply units.	1SVR 427 071 R0000
CP-A CM	Control module The CP-A CM provides monitoring of the input signals of the redundancy unit CP-A RU.	1SVR 427 075 R0000

Application

The primary switch mode power supply CP-S 24/10.0 has two voltage inputs. This enables the supply with AC or DC. Furthermore the CP-S 24/10.0 is equipped with two generous capacitors, which ensure mains buffering of at least 50 ms. That is why the devices can be used worldwide also in high fluctuating networks and battery-powered plants.

Due to their reliable construction, the devices can be used in very harsh industrial environments.

The power reserve of up to 20 % enables trouble-free starting of heavy loads, so that no oversized power supply is needed.

Power supply CP-S 24/10.0

Primary switch mode power supply

Data sheet


Operating mode

Parallel operation

In order to enable redundancy, up to 5 devices can be connected in parallel. For a symmetric distribution it is advisable to execute the line connections with the same cross sections and same lengths.

Parallel operation, redundancy - without CP-A RU

Redundant circuits are suitable to increase the operational reliability in case of errors. If a fault occurs in the first power supply circuit (called initial fault), the power supply of all consumers will be taken over by the second, redundant supply circuit. For this reason the power supply units to be connected in parallel are dimensioned in such a way that the total current requirement of all consumers can be completely covered by one power supply unit.

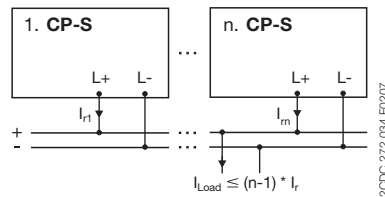


Extended function with accessories

Parallel operation, true redundancy with decoupling provided by the CP-A RU

Redundant circuits are used to increase the operational reliability and eliminate power supply outages. Events that can cause a power supply failure include: incorrect wiring, blown fuses or failure of a single power supply. If a fault event occurs (called initial fault) in the first power supply circuit, power to all loads is then supplied by the second (redundant) power supply. For this reason, both power supplies must be sized to handle the total current requirement of all loads. The primary and the redundant power supplies are decoupled from one another by the CP-A RU unit.

It automatically switches from the primary to the redundant supply after a fault. It decouples the output of the failed power supply from the redundant supply preventing the initial fault from shorting or compromising the redundant supplies' output. In this way, uninterrupted supply of power to all loads is guaranteed.

When available, the two power supplies should be connected to different input voltage phases, to avoid loss of power caused by a blown fuse on the primary side of the power supplies.

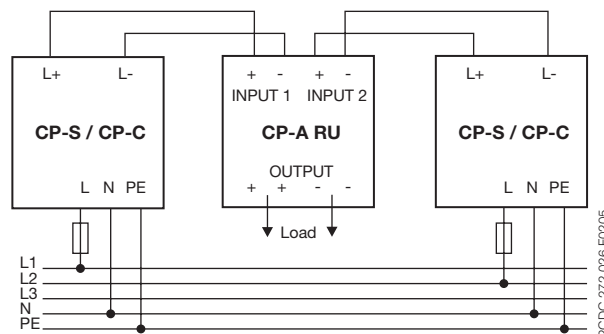


Power supply CP-S 24/10.0

Primary switch mode power supply

Data sheet

Extended function with accessories

Decoupling of power supply units with output currents > 20 A

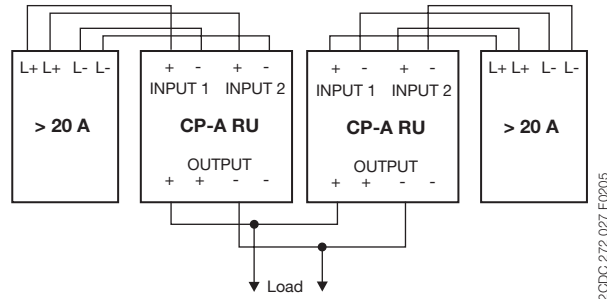

Control of input voltages of CP-A RU with CP-A CM

The control module CP-A CM indicates the presence of both input voltages of the CP-A RU via LEDs and energized output relays.

The threshold values for the output relays are adjustable separately per channel from 14 to 28 V. If, by a fault (e.g. failure of a power supply, blown fuse), the voltage in a channel drops below the adjusted threshold value, the corresponding output relay de-energizes. The green LEDs "IN 1", "IN 2" glow, if the corresponding voltage exceeds the adjusted threshold value. The green LED "OUT" glows, if the output voltage is higher than 3 V.


Examples of application with accessories

CP-A RU with CP-A CM for monitoring of two power supplies -

In case of fault: Fault signal

If both relays are de-energized, the voltages of both channels are below the adjusted threshold value (e.g. 20 V). This could mean, that both power supply units failed or are switched off, or that there is an overload on the secondary side. Momentary de-energization of the relays may be caused by inrush current of a connected load, during starting.

If one of the two relays de-energizes, this can indicate that the primary power supply unit failed or is switched off, and the redundant power supply is now supplying power to the load.

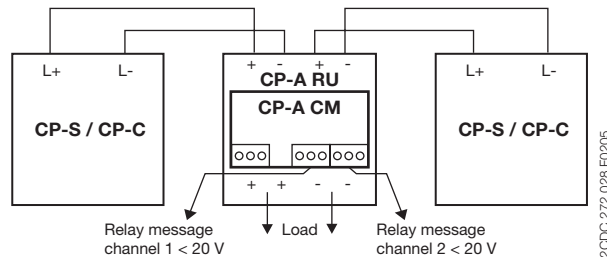

Power supply CP-S 24/10.0


Primary switch mode power supply

Data sheet

Examples of application with accessories

CP-A RU with CP-A CM for monitoring of one power supply - In case of fault: Transfer to an alternative power supply


The following example of application shows transferring to an alternative power supply (in this example a battery) after a failure in the primary power supply unit.

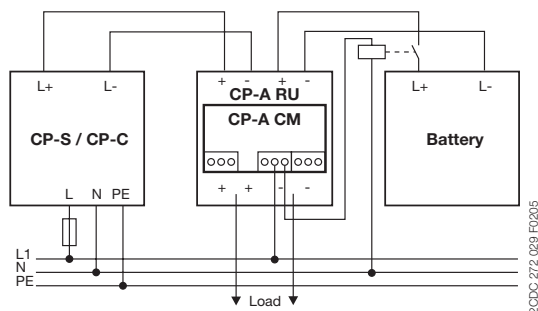

Installation


Mounting

The switch mode power supply can be snapped on a DIN rail (TH 35-15 or TH 35-7.5 according to IEC/EN 60715) as shown in the accompanying picture. For that the device is set with its mounting rail slide on the upper edge of the mounting rail and locked by lifting it downwards.

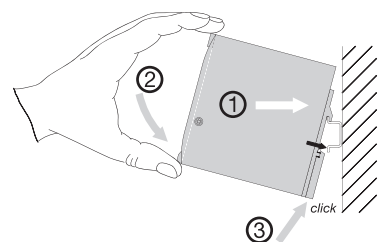

Demounting

Remove the switch mode power supply as shown in the accompanying picture. For that the latching lever is pulled downwards by means of the screwdriver. Then the device can be unhinged from the mounting rail edge and removed.

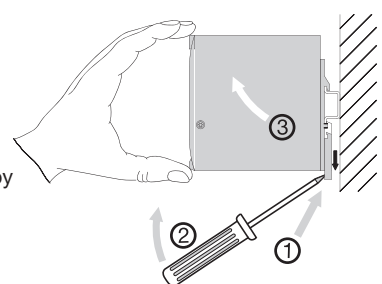

Power supply CP-S 24/10.0

Primary switch mode power supply


Data sheet

Installation

Mounting position

The devices have to be mounted horizontally with the input terminals on the bottom.

In order to ensure a sufficient convection, the minimum distance to other modules must not be less than 80 mm in vertical direction and 10 mm in horizontal direction.

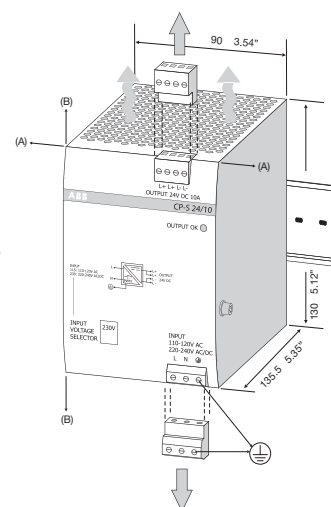


Electrical connection of primary and secondary side

Connect the input terminals L and N. The protective earth conductor PE must be connected. Actuate plug connector only when power is off. The installation must be executed acc. to EN 60950, provide a suitable disconnecting device (e. g. line protection switch) in the supply line. The input side is protected by an internal input fuse.

Rate the lines for the maximum output current or provide a separate fuse protection. We recommend to choose the cable section as large as possible in order to minimize voltage drops. Observe the polarity. Actuate plug connector only when power is off. The device is overload, short-circuit and open-circuit proof. The secondary side of the power supply is electrically isolated from the input and internally not earthed (SELV) and can therefore be earthed by the user according to the needs with L+ or L- (PELV).

Connection diagram(s)

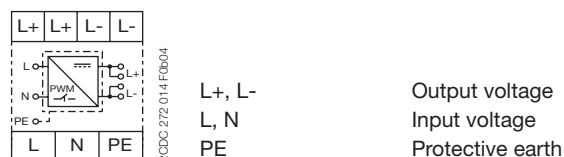

Power supply CP-S 24/10.0

Primary switch mode power supply

Data sheet



Safety instructions and warnings

The device must be installed by qualified persons only and in accordance with the specific national regulations (e. g. VDE, etc.).

The CP-S 24/10.0 is a chassis-mounted unit. It is maintenance-free and does not contain any integral setting elements and should therefore not be opened.

Before any installation, maintenance or modification work:

Disconnect the system from the supply network and protect against switching on!

Before start of operation the following must be ensured:

- Connect to main according to the specific national regulations for class of protection I.
- Power supply cables and unit must be sufficiently fused. A disconnecting device has to be provided for the end product to disengage unit and supply cables from supply mains if required.
- The protective earth conductor must be connected to the terminal PE.
- Rate the output lines for the output current of the power supply and connect them with the correct polarity.
- In order to ensure sufficient air-cooling the distance to the other devices has to be considered.
- The „INPUT VOLTAGE SELECTOR“ must be set properly.
- Screws at the enclosure are for internal grounding. Do not remove them! Do not connect cable!

Attention! Improper installation/operation may impair safety and cause operational difficulties or destruction of the unit.

In operation pay attention to:

- Do not modify the installation (primary and secondary side)! High current! Risk of electric arcs and electric shock (danger to life)!
- (Dis)connect the plug connector only when the power is off.
- Risk of burns: Depending on the operation conditions the enclosure can become very hot.
- If the internal fuse blows, most probably the device is defect. In this case, an examination of the switch mode power supply by the manufacturer is necessary.

Attention! Danger to life!



Disconnect the system from the supply network before executing any works at the device and protect against switching on! The power supply contains components with high stored energy and circuits with high voltage! Do not introduce any objects into the unit and do not open the unit.

With some units of this range the output is capable of providing hazardous energy. Ensure that the service personnel is protected against inadvertent contact with parts carrying energy.

Power supply CP-S 24/10.0

Primary switch mode power supply

Data sheet

Technical data

Data at $T_a = 25\text{ °C}$, $U_{in} = 230\text{ V AC}$ and rated values, unless otherwise indicated

Input circuits - Supply circuits			1SVR 427 015 R0100			
Rated input voltage U _{in}	switch position 115	L, N	110-120 V AC			
	switch position 230	L, N	220-240 V AC			
Typical current / power consumption			110 V AC	120 V AC	220 V AC	240 V AC
	at 110-120 V AC		4.2 A / 269 W	4.0 A / 269 W	- / -	- / -
	at 220-240 V AC		- / -	- / -	2.4 A / 269 W	2.2 A / 269 W
Input voltage range	switch position 115	AC	85-132 V AC			
	switch position 230	AC	184-264 V AC			
		DC	220-350 V DC (at U > 264 V use additionally an appropriate external fuse)			
Frequency range		AC	47-63 Hz			
		DC	0 Hz			
Inrush current limiting			< 40 A			
I²t at cold start			approx. 1.8 A²s			
Discharge current towards PE			< 3,5 mA			
Power failure buffering time			min. 50 ms			
Transient overvoltage protection			Varistors			
Internal input fuse (apparatus protection, not accessible)			6.3 A slow-acting			
Power factor correction (PFC)			no			
Indication of operational states			1SVR 427 015 R0100			
Output voltage	OUTPUT OK: green LED		 : output voltage OK			
Output circuits			1SVR 427 015 R0100			
Rated output voltage	L+, L+, L-, L-		24 V DC			
Tolerance of the output voltage			-1...+5 %			
Rated output power			240 W			
Rated output current I _r	T _a ≤ 60 °C		10 A			
Peak output current (power reserve)	T _a ≤ 40 °C		typ. ≤ 12.25 A			
Derating of the output current			60 °C < T _a ≤ 70 °C			
Deviation	load change statical 10-90 %		2.5 % per Kelvin temperature increase			
	load change dynamical 10-90 %		typ. ± 0.1 %			
	change of input voltage ± 10 %		typ. <± 3 %			
change of input voltage ± 10 %			typ. ± 0.05 %			
Control time			typ. < 1 ms			
Starting time after applying supply voltage			< 250 ms			
Rise time	10-90 %		typ. < 5 ms			
Residual ripple and switching peaks	BW = 20 MHz		typ. < 50 mV _{pp}			
Parallel connection			yes, up to 5 devices, to enable redundancy, current not symmetrical			
Series connection			yes, to increase voltage			
Resistance to reverse feed			approx. 35 V DC			
Characteristic curve of output			U/I characteristic curve with power reserve			
Short-circuit protection			continuous short-circuit stability			
Current limiting at short circuit			approx. 19 A			

Power supply CP-S 24/10.0

Primary switch mode power supply

Data sheet

Output circuits		1SVR 427 015 R0100
Overload protection		thermal protection
Starting of capacitive loads		unlimited
General data		1SVR 427 015 R0100
Power dissipation		typ. < 29 W
Dimensions (W x H x D)		93.5 x 130 x 135.5 mm (3.68 x 5.12 x 5.35 inches)
Material of enclosure	cover	zinc-coated sheet steel
	enclosure shell	aluminium
Efficiency		typ. 89 %
Weight		approx. 1.07 kg (approx. 2.36 lb)
Mounting position		horizontal
Minimum distance to other units normal operation mode		
	horizontal	10 mm (0.39 inch)
	vertical	80 mm (3.15 inch)
Mounting		DIN rail (IEC/EN 60715), snap-on mounting
Degree of protection	enclosure / terminals	IP20 / IP20
Class of protection (EN 61140)		I
Electrical connection		1SVR 427 015 R0100
Input circuit		
Wire size	fine-strand with wire end ferrule	0.2-2.5 mm ² (24-14 AWG)
	fine-strand without wire end ferrule	0.2-2.5 mm ² (24-14 AWG)
	rigid	0.2-2.5 mm ² (24-14 AWG)
Stripping length		7 mm (0.28 inches)
Tightening torque		0.4 Nm
Output circuit		
Wire size	fine-strand with wire end ferrule	0.12-2.5 mm ² (26-14 AWG)
	fine-strand without wire end ferrule	0.12-2.5 mm ² (26-14 AWG)
	rigid	0.12-2.5 mm ² (26-14 AWG)
Stripping length		8 mm (0.31 inches)
Tightening torque		0.4 Nm
Environmental data		1SVR 427 015 R0100
Ambient temperature range	operation	-25...+70 °C
	full load	0...+60 °C (without derating)
	storage	-40...+85 °C
Damp heat (IEC/EN 60068-2-3)		93 % at +40 °C, no condensation
Climatic category (IEC/EN 60721)		3k3
Vibration (IEC/EN 60068-2-6)		
Shock (IEC/EN 60068-2-27)		

Power supply CP-S 24/10.0

Primary switch mode power supply

Data sheet

Isolation data		1SVR 427 015 R0100
Rated insulation voltage U_i between all isolated circuits (IEC/EN 60950-1; EN 50178)	Eingang / Ausgang	300 V
	Eingang / PE	300 V
	Ausgang / PE	50 V
Rated impulse withstand voltage U_{imp} between all isolated circuits (IEC/EN 60950-1; EN 50178)	Eingang / Ausgang	4 kV; 1.2/50 μ s
	Eingang / PE	2.5 kV; 1.2/50 μ s
	Ausgang / PE	500 V; 1.2/50 μ s
Power-frequency withstand voltage (test voltage) (routine test / type test)	Eingang / Ausgang	1.5 kV AC / 3.0 kV AC
	Eingang / PE	1.5 kV AC / 3.0 kV AC
	Ausgang / PE	500 V DC / 500 V DC
Pollution degree (IEC/EN 60950; EN 50178)		2
Overvoltage category (IEC/EN 60950; EN 50178)		II
Standards / Directives		1SVR 427 015 R0100
Product standard		IEC/EN 61204
EMC Directive		2004/108/EC
Low Voltage Directive		2006/95/EC
RoHS-Directive		2002/95/EC
Electrical safety		EN 50178, EN 60950, UL 60950, UL 508
Protective low voltage		SELV (EN 60950)
Electromagnetic compatibility		1SVR 427 015 R0100
Interference immunity to		IEC/EN 61000-6-2
electrostatic discharge	IEC/EN 61000-4-2	Level 4 (8 kV / 15 kV)
radiated, radio-frequency, electromagnetic field	IEC/EN 61000-4-3	Level 3 (10 V/m)
electrical fast transient / burst	IEC/EN 61000-4-4	Level 4 (4 kV)
surge	IEC/EN 61000-4-5	Level 4 (2 kV symmetrical) Level 3 (3 kV asymmetrical)
conducted disturbances, induced by radio-frequency fields	IEC/EN 61000-4-6	Level 3 (10 V)
Interference emission		IEC/EN 61000-6-3
high-frequency radiated	IEC/CISPR 22, EN 55022	Class B
high-frequency conducted	IEC/CISPR 22, EN 55022	Class B


Power supply CP-S 24/10.0

Primary switch mode power supply

Data sheet


Technical diagrams

Characteristic curve of output

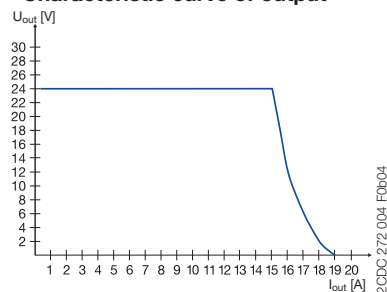

Characteristic curve of output at $T_a = 25^\circ\text{C}$

Characteristic curve of temperature

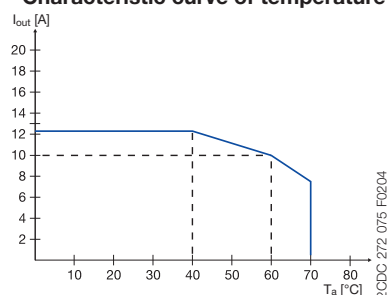

Characteristic curve of temperature at $U_{out} = 24\text{ V}$

The switch mode power supply CP-S 24/10.0 is able to supply at 24 V DC output voltage and at an ambient temperature of

- $\leq 40^\circ\text{C}$ a continuous output current of typ. $\leq 12.25\text{ A}$
- $\leq 60^\circ\text{C}$ the rated current of 10 A


At ambient temperatures of:

- $> 60^\circ\text{C}$ the output power has to be reduced by 2.5 % per Kelvin temperature increase.
- $> 70^\circ\text{C}$ i.e. thermal overload, the device will switch-off.

If the switch mode power supply is loaded with an output current $> 12.25\text{ A}$, the operating point is passing through the U/I characteristic curve shown.

Dimensions

in mm

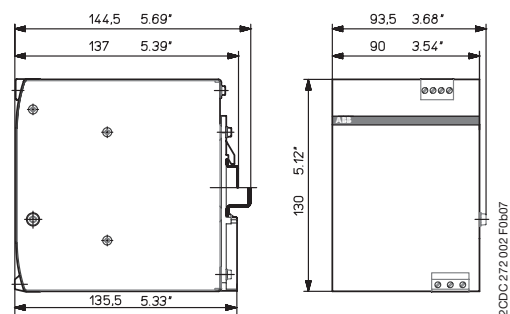

CP-S 24/10.0