

Product datasheet

Specifications



converter module, modicon, 24W,
24 to 28.8V DC, 12V DC, 2A, for
regulated SMPS

ABL8DCC12020

Main

Range of product	Phaseo Universal
Product or component type	Converter module
Rated power in W	24 W
Input voltage	24...28.8 V DC
Output voltage	12 V DC
Power supply output current	2 A

Complementary

Input voltage limits	22...30 V
Efficiency	82 %
Power dissipation in W	4 W
Input protection type	Against reverse polarity
Output voltage limits	7...15 V
Line and load regulation	1...3 %
Residual ripple	<= 100 mV
Output protection type	Against overload, protection technology: automatic reset Against overvoltage, protection technology: tripping if U > 7.8 V, automatic reset Against short-circuits, protection technology: automatic reset
Connections - terminals	For input connection: screw type terminals, connection capacity: 2 x 0.5...2 x 4 mm ² AWG 24...AWG 10 For output connection: screw type terminals, connection capacity: 2 x 0.5...2 x 4 mm ² AWG 24...AWG 10
Fixing mode	By clips on 35 mm symmetrical DIN rail, operating position: horizontal By clips on 35 mm symmetrical DIN rail, operating position: vertical
Operating altitude	2000 m
Name of test	Induced electromagnetic field conforming to IEC 61000-4-6 level 3 Radiated electromagnetic field conforming to IEC 61000-4-3 level 3 Rapid transient conforming to IEC 61000-4-4 level 3 Surge conforming to IEC 61000-4-5 level 2 Conducted/radiated emissions conforming to EN 55022 class B Electrostatic discharges conforming to IEC 61000-4-2 Emission conforming to IEC 61000-6-3
Local signalling	1 LED (green) for output voltage (> 6 V)
Net weight	0.3 kg

Environment

IP degree of protection	IP20 conforming to IEC 60529
-------------------------	------------------------------

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Ambient air temperature for operation	-25...60 °C
Ambient air temperature for storage	-40...85 °C
Relative humidity	0...90 % during operation 0...95 % during storage
Overvoltage category	Class 3
Vibration resistance	2 gn (f= 11.9...150 Hz) conforming to IEC 61131-2 3.5 mm (f= 3...11.9 Hz) conforming to IEC 61131-2
Dielectric strength	500 V between input and ground 500 V between input and output 500 V between output and ground
Product certifications	RCM EAC cCSAus UL
Environmental characteristic	EMC conforming to EN 50081-1 EMC conforming to IEC 61000-6-3 EMC conforming to IEC 61000-6-2 Safety conforming to IEC 60950-1 Safety conforming to IEC 61204

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	6.500 cm
Package 1 Width	14.500 cm
Package 1 Length	16.500 cm
Package 1 Weight	601.000 g
Unit Type of Package 2	S04
Number of Units in Package 2	18
Package 2 Height	30.000 cm
Package 2 Width	40.000 cm
Package 2 Length	60.000 cm
Package 2 Weight	12.161 kg

Contractual warranty

Warranty	18 months
----------	-----------

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

How this information helps you >

Environmental footprint

Carbon footprint (kg.eq.CO2 per CR, Total Life cycle)	78
---	----

Environmental Disclosure	Product Environmental Profile
--------------------------	---

Use Better

Materials and Substances

Packaging made with recycled cardboard	No
--	----

Packaging without single use plastic	Yes
--------------------------------------	-----

EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
-------------------	--

REACH Regulation	REACH Declaration
------------------	-----------------------------------

China RoHS Regulation	China RoHS declaration
-----------------------	--

PVC free	Yes
----------	-----

Use Again

Repack and remanufacture


Circularity Profile	End of Life Information
---------------------	---

Take-back	No
-----------	----

Dimensions Drawings


Converter Module

Dimensions

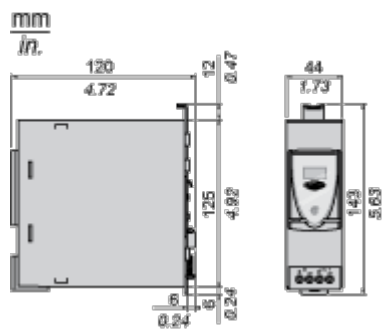

Connections and Schema

Internal Wiring Diagram

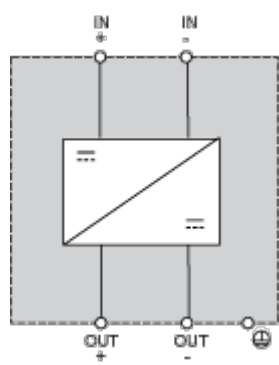

Scheme of Use with ABL4 Power Supplies

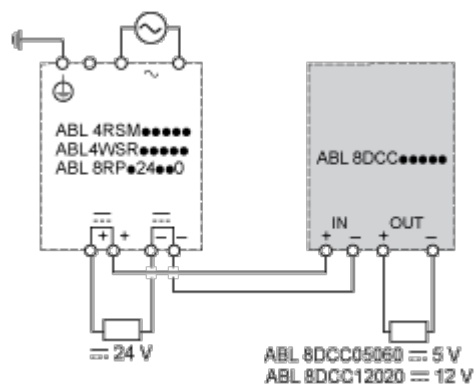


Image of product / Alternate images

Alternative

