

Product data sheet

Specifications



Harmony GTUX Series eXtreme Display 7.0-inch Wide, Outdoor use, Rugged, Coated

HMIDT35X

Product availability: Stock - Normally stocked in distribution facility

Price*: 1,200.00 USD

Main

Range of Product	Harmony GTUX
Product or Component Type	EXtreme touchscreen panel
Terminal type	Touchscreen display
[Us] rated supply voltage	12 V DC power supply
Supply voltage limits	10.8...28.8 V
Power consumption in W	12.5 W
Inrush current	30 A

Complementary

Touchscreen resolution	1024 x 1024
Pixel resolution	800 x 480
Display size	7 inch
Aspect ratio	4:3
Display type	Colour TFT LCD
Display Resolution	800 x 480 pixels WVGA
Display colour	262144 colors
Luminance	92.9 fc (1000 cd/m²)
Touch panel	Single touch analogue resistive
type of cooling	Natural convection
Cut-out dimensions	394 (+ 1/- 0) x 250 (+ 1/- 0) mm
Width	8.02 in (203.6 mm)
Height	5.9 in (148.6 mm)
Depth	1.5 in (37 mm)
Net Weight	2.9 lb(US) (1.3 kg)

Environment

IP degree of protection	IP66f IP67f Front panel Type 4X
-------------------------	---------------------------------------

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Standards	UL 61010 UL 121201 Class I division 2 CSA C22.2 No 213 CSA C22.2 No 61010-1 IEC 61132-2
Product Certifications	KC CE RCM EAC ATEX zone 2/22 IEC-Ex UL CSA UKCA UKEX
Ambient air temperature for operation	-22...149 °F (-30...65 °C)
Ambient air temperature for storage	-22...158 °F (-30...70 °C)
Pollution degree	2
Environmental characteristic	Corrosive gas free UV resistant
Relative Humidity	10...90 % non-condensing
Operating altitude	6561.68 ft (2000 m)
Vibration resistance	7 mm constant amplitude 5...9 Hz) IEC 61131-2 19.6 m/s² 9...150 Hz) IEC 61131-2
Shock resistance	392 m/s²IEC 61131-2
Electromagnetic compatibility	Electrostatic discharge immunity test level 3 conforming to IEC 61000-4-2

Ordering and shipping details

Category	US10MC222567
Discount Schedule	0MC2
GTIN	3606489747947
Returnability	Yes
Country of origin	CN

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	5.16 in (13.1 cm)
Package 1 Width	8.27 in (21 cm)
Package 1 Length	10.24 in (26 cm)
Package 1 Weight	3.316 lb(US) (1.504 kg)
Unit Type of Package 2	S04
Number of Units in Package 2	4
Package 2 Height	11.81 in (30 cm)
Package 2 Width	15.75 in (40 cm)
Package 2 Length	23.62 in (60 cm)
Package 2 Weight	15.2 lb(US) (6.9 kg)
Unit Type of Package 3	P12

Number of Units in Package 3	32
Package 3 Height	53.15 in (135 cm)
Package 3 Width	31.50 in (80 cm)
Package 3 Length	47.24 in (120 cm)
Package 3 Weight	154.086 lb(US) (69.892 kg)

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

How this information helps you >

 Environmental footprint	
Carbon footprint (kg CO2 eq, Total Life cycle)	337
Environmental Disclosure	Product Environmental Profile

Use Better

 Materials and Substances	
Packaging made with recycled cardboard	Yes
Packaging without single use plastic	No
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
SCIP Number	Bec78d47-e62d-44d7-8e6f-c4f5bb86ee60
REACH Regulation	REACH Declaration
China RoHS Regulation	China RoHS declaration
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Use Again

 Repack and remanufacture

Circularity Profile

[End of Life Information](#)


Take-back

No

Dimensions Drawings


External Dimensions

Display Unit

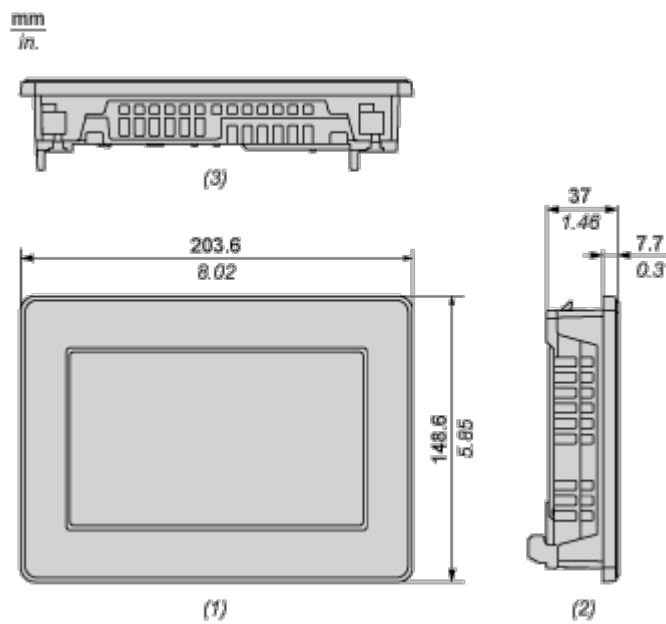


- 1 : Front
- 2 : Left
- 3 : Bottom

Display Unit with Box Module

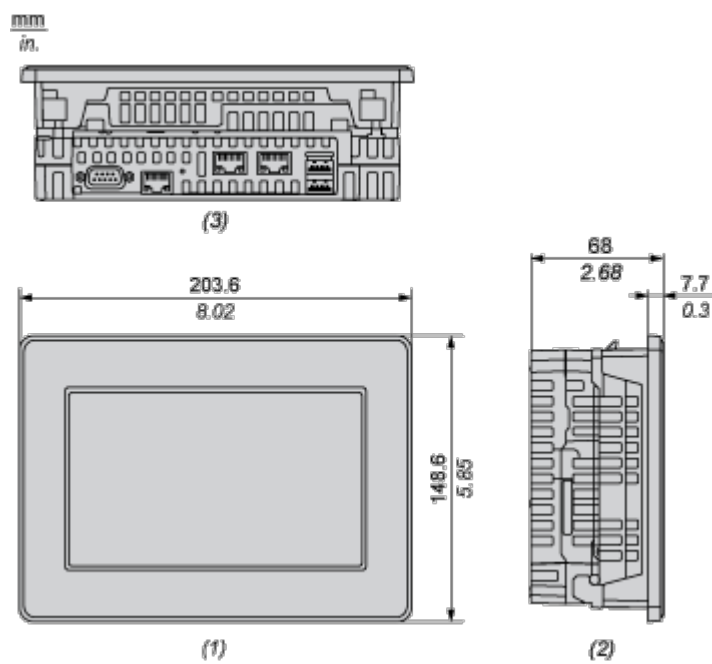

- 1 : Front
- 2 : Left
- 3 : Bottom

Dimensions with Cables

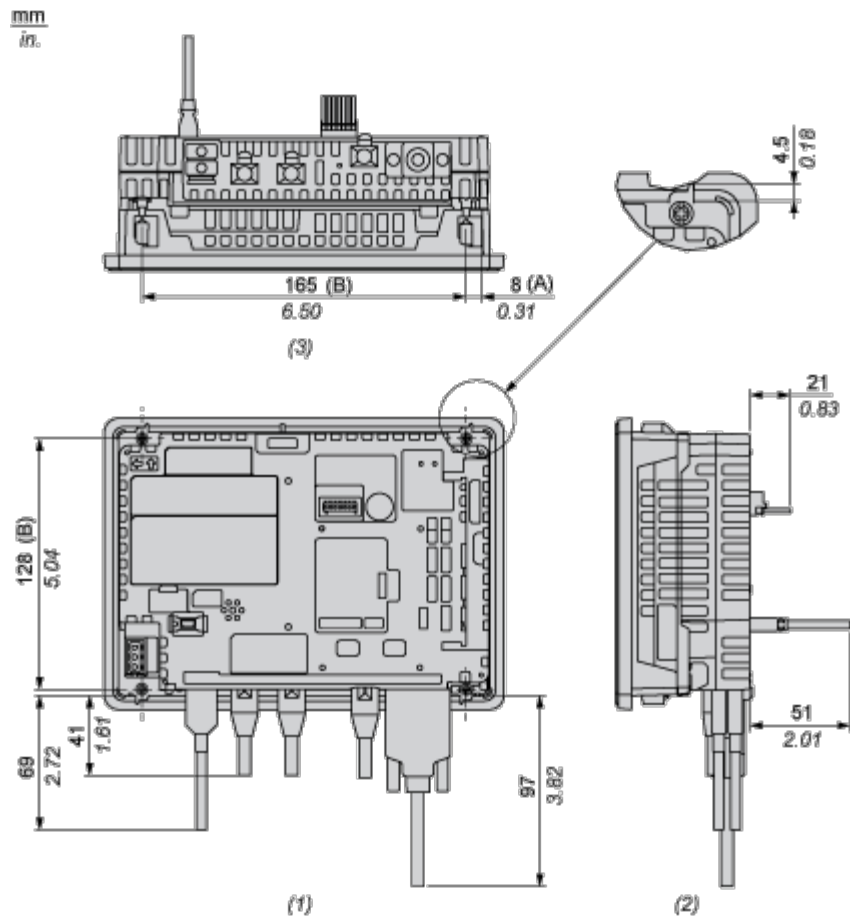


- (A) : Rotation area of the fastener
- (B) : Pitch of the enter of installation fastener screws
- 1 : Rear
- 2 : Right
- 3 : Bottom

Mounting and Clearance

Mounting and Clearance

Panel Cut Dimensions

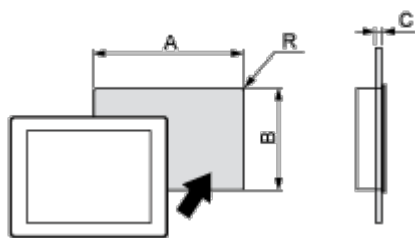

Dimensions in mm


A	B	C	R
190 (+1/-0)	135 (+1/-0)	1.6...5	3 max.

Dimensions in in.

A	B	C	R
7.48 (+0.04/-0)	5.31 (+0.04/-0)	0.06...0.2	0.12 max.

Installation Requirements

Mounting Angle



When installing this product in a slanted position, the product face should not incline more that 30°.

Clearance

