

Product data sheet

Specifications



Base unit, Harmony GTU, spare part, open box for universal panel

HMIG5U

 **Discontinued on:** Sep 27, 2024

Product availability: Non-Stock - Not normally stocked in distribution facility

 **Discontinued**

Main

Range of Product	Harmony GTU
Product or Component Type	Base unit
Device short name	Open Box
Range Compatibility	Harmony GTU
[Us] rated supply voltage	12...24 V DC power supply

Complementary

Integrated connection type	Ethernet TCP/IP 2 RJ45 COM1 serial link RJ45 RS485 110...115200 bit/s COM2 serial link SUB-D 9 RS232C/RS422/RS485 110...115200 bit/s Auxiliary port terminal block Expansion unit fieldbus card USB 2.0 port mini B USB DVI-D video port DVI-D Microphone mini-jack USB 2.0 port 3 USB type A
Operating system	Windows Embedded 7
Software package	Internet Explorer Vijeo Citect web client Vijeo Designer run time .NET framework 4.0 Adobe PDF reader CAD viewer Multimedia player Office reader VNC client/server
Processor name	Intel X86 1.3 GHz
Data storage equipment	16 GB CFast card
Port Ethernet	10BASE-T/100BASE-TX/1000BASE-T
Memory description	512 KB NVRAM backup memory 2 GB RAM internal
Width	7.4 in (188 mm)
Height	5.2 in (131 mm)
Net Weight	2.0 lb(US) (0.9 kg)

Environment

Standards	CSA C22.2 No 142 ANSI/ISA 12-12-01 UL 508 Class I division 2 CSA C22.2 No 213 IEC 61132-2
-----------	---

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Ambient air temperature for operation	32...140 °F (0...60 °C)
Ambient air temperature for storage	-4...140 °F (-20...60 °C)
Pollution degree	2 EN 61131-2 Ed.3
Relative Humidity	10...90 % non-condensing
Operating altitude	6561.68 ft (2000 m)
Vibration resistance	3.5 mm constant amplitude 5...9 Hz) EN/IEC 61131-2 9.8 m/s² 9...150 Hz) EN/IEC 61131-2
Electromagnetic compatibility	Electrostatic discharge immunity test conforming to EN/IEC 61000-4-2 level 3

Ordering and shipping details

Category	US10MC222567
Discount Schedule	0MC2
GTIN	3606480687211
Returnability	Yes
Country of origin	CN

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	5.31 in (13.5 cm)
Package 1 Width	8.27 in (21.0 cm)
Package 1 Length	10.43 in (26.5 cm)
Package 1 Weight	2.560 lb(US) (1.161 kg)

Contractual warranty

Warranty	18 months
----------	-----------

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

How this information helps you >

Environmental footprint

Carbon footprint (kg CO2 eq, Total Life cycle)	1697
--	------

Environmental Disclosure	Product Environmental Profile
--------------------------	---

Use Better

Materials and Substances

EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
SCIP Number	A905f611-0f0f-4059-8d6d-22e0091b08d1
REACH Regulation	REACH Declaration
China RoHS Regulation	China RoHS declaration
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Use Again

Repack and remanufacture

WEEE




The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Dimensions Drawings

Dimensions

External Dimensions

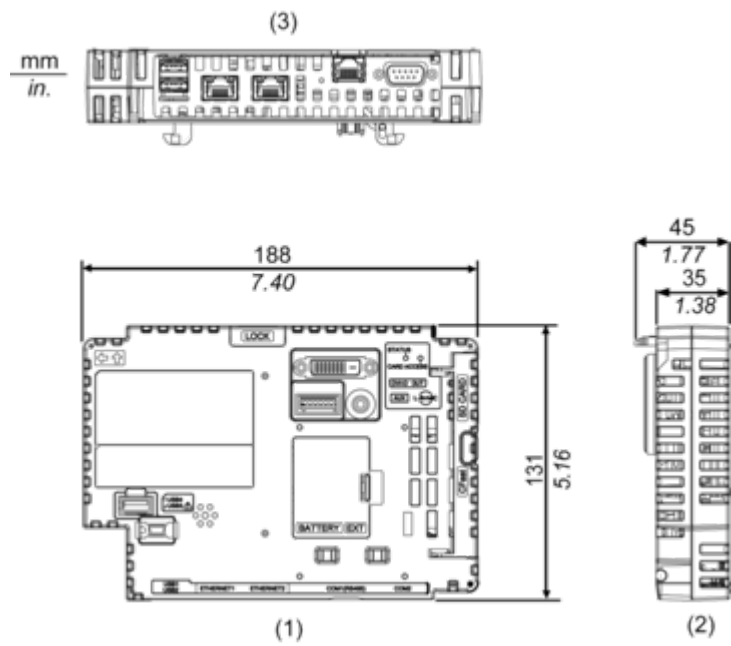

- 1 Front
- 2 Left
- 3 Bottom

Image of product / Alternate images

Alternative



