

Product datasheet

Specifications



small panel touchscreen+keypad -
matrix screen - G-O-R - 198 x 80
pixels - 24VDC

XBTRT511

⚠ Discontinued on: 1 Nov 2020

⚠ Discontinued

EAN Code: 3595864000015

Main

Range of product	Magelis XBTRT
Display resolution	198 x 80 pixels
Software type	Configuration software
Software designation	Vijeo Designer Lite
Operating system	Windows

Complementary

Display type	Extra-bright matrix backlit LCD
Touch panel	Matrix
Touch sensitive zone	11 x 5 cells
Character font	Katakana Cyrillic Latin Greek Chinese (simplified Chinese)
Supply voltage limits	18...30 V
Residual ripple	<= 1200 mV
Power consumption in W	5 W
Number of key	12
Number of fixed keys	2
Number of customisable keys	10
Local signalling	13 LEDs 1 buzzer
Number of pages	200 application pages 256 alarm pages
Memory type	Flash
Memory capacity	512 KB
Integrated connection type	Serial link: female RJ45, asynchronous transmission mode (RS232C/ RS485)multidrop topology Power supply: removable screw terminal block Printer port: 8-way female mini DIN
Realtime clock	Access to the PLC real-time clock

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Range compatibility	Modicon Premium Modicon TSX Micro Modicon Momentum Modicon Quantum Modicon M340 Twido
Product mounting	Flush mounting
Fixing mode	By 4 spring clips (1.5 to 6 mm thick panel)
Display material	Polyester
Front material	PPT
Keypad material	Polyester
Marking	CE
Height	118 mm
width	137 mm
Depth	79 mm
Cut-out dimensions	119.6 (+/- 0.5) x 105.2 (+/- 0.4) mm
Net weight	0.55 kg

Environment

Product or component type	Small panel with touchscreen and keypad
Display colour	Orange Red Green
display capacity	Graphic objects (bargraph, button, light...) 2 lines of 5 characters minimum 10 lines of 33 characters maximum
[Us] rated supply voltage	24 V DC
Supply	External source
Downloadable protocols	Third party protocols Modbus Uni-TE
Standards	IEC 60068-2-27 CSA C22.2 No 14 IEC 60068-2-6 IEC 61131-2 UL 508
Product certifications	UL Class 1 Division 2 ATEX zone 2/22 UL 1604 CSA Class 1 Division 2
Ambient air temperature for operation	0...55 °C
Ambient air temperature for storage	-20...60 °C
Relative humidity	0...85 % without condensation
IP degree of protection	IP20 (rear panel) conforming to IEC 60529 IP65 (front panel) conforming to IEC 60529
NEMA degree of protection	NEMA 4X front panel (indoor use)
Shock resistance	15 gn for 11 ms conforming to IEC 60068-2-27
Vibration resistance	+/- 3.5 mm (f= 2...8.45 Hz) conforming to IEC 60068-2-6 1 gn (f= 8.45...150 Hz) conforming to IEC 60068-2-6
Resistance to electromagnetic fields	10 V/m conforming to IEC 61000-4-3

Packing Units


Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	8.0 cm
Package 1 Width	17.0 cm
Package 1 Length	25.0 cm
Package 1 Weight	707.0 g

Contractual warranty

Warranty	18 months
----------	-----------

Dimensions Drawings

Dimensions

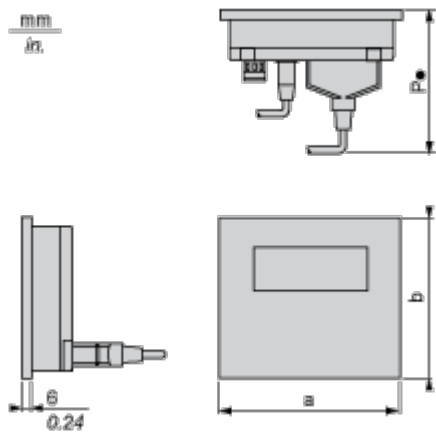

a		a1 (1)		b		b1 (1)		P1 (2)		P2 (3)		P3 (4)		P4 (5)	
mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.
137	5.39	160	6.29	118	5	146	6	79	3.11	104	4.09	58	2.28	104	4.09

(1) With fixing clips (included with product)

(2) P1: depth with RJ45 cable XBTZ9780 (for Twido, TSX Micro and Premium)


(3) P2: depth with 25-way SUB-D cable XBTZ938 (for TeSys model U and ATV 61/71 drives)

(4) P3: depth with 25-way SUB-D angled cable XBTZ9680 (for Twido, TSX Micro and Premium) or XBTZ998 (for Modicon STB)

(5) P4: depth with 25-way SUB-D cable XBTZ68/Z9681(for Twido, TSX Micro and Premium)

Mounting and Clearance

Cut-out for Flush Mounting



Panel thickness = 1.5...6 mm / 0.05...0.23 in.

H		G		r max.	
±0.4 mm	±0.02 in.	±0.5 mm	±0.02 in.	mm	in.
105.2	4.14	119.6	5	1.5	0.05